

# Trampoline & Enclosure Disassembly Instructions

The information in this document is subject to change without notice.  
© Copyright Springfree Trampoline Inc. 2005, 2016. All rights reserved.  
721004

## WARNING


Read the warnings on this page and those contained in the User Guide before you assemble and use the trampoline and enclosure.

-  Disassembly of the trampoline in any way other than what is set out in these instructions could cause serious injury or damage the trampoline.
-  Do not attempt to disassemble any frame components before the mat and white mat rods have been removed.
-  Treat any loaded rod with caution until you are sure it is properly installed or uninstalled. Keep your face well away from any loaded rod.
-  Never attempt to remove a black net rod from its net pocket or disengage (unlock) the rod sleeve while the black net rod is under tension.
-  Do not hold onto, or place fingers between the rods while someone is jumping on the trampoline.
-  It is recommended that you wash your trampoline, and ensure all components are dry, prior to disassembly. Refer to the User Guide for washing instructions.
-  Disassembling the trampoline can be challenging if you don't carefully follow these instructions. To make it easier, we have helpful demonstration videos that will guide you through each step. Visit <http://springfr.ee/disassem> or scan the code in Step 1 to get started.
-  Your trampoline model may differ from the one shown however, the disassembly steps remain the same.

## WARNING

Please read the following precautions carefully before beginning the assembly process. Retain for future reference.

1. Keep small children at least 25 ft (7.5 m) away while disassembling the trampoline; they could be injured by improperly assembled rods releasing and ejecting from the frame.
2. Disassembly typically takes two hours to complete. Two people are recommended.
3. Gloves are recommended during the disassembly process.
4. Be aware that when loaded, the rods can spring back and may cause injury.
5. Treat any loaded rod with caution until you are sure it is properly uninstalled. In particular, keep your face well clear of the rods during assembly or disassembly. An improperly installed rod could release and cause facial injury or blindness.
6. The sleeves on the rods are intended to provide protection from fibers or splinters. Do not remove the sleeve. If they are damaged, replace them.
7. Check all trampoline components for wear or damage prior to storage or reassembly.

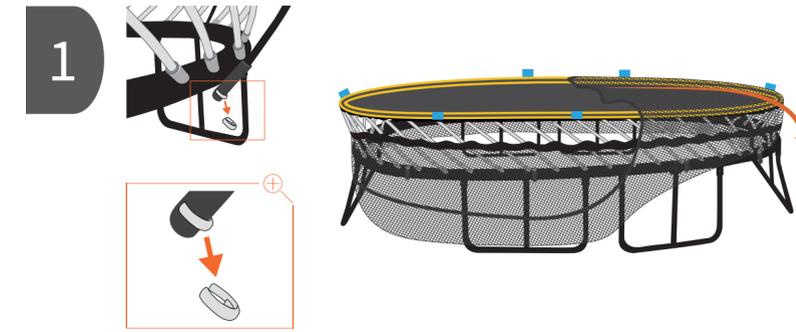


 **WARNING** - Never attempt to remove a black net rod from its net rod pocket or disengage (unlock) the rod sleeve while the black net rod is under tension. Always ensure a solid grip when handling and do not stand directly in front of the rods.

 **TIP** - If you're having difficulty removing the black net rod from the net rod pocket, twist the ball end of the rod and pull to release it.  
**TIP** - Be sure to follow the steps below in the order presented.

- Remove the white c-clips located on the net rod sockets. Lift the bottom end of the black net rods out of the net rod sockets and lower the net.
- Remove the black net rods from the net rod pockets and the horizontal net rods (if applicable) from the top edge of the net.
- Starting at a corner, carefully pull the top edge of the net down over the edge of the mat. Continue around the trampoline until the net is sitting at the bottom of the mat rods.


 **SCAN HERE** or visit <http://springfr.ee/disassem> for a helpful disassembly demonstration video.

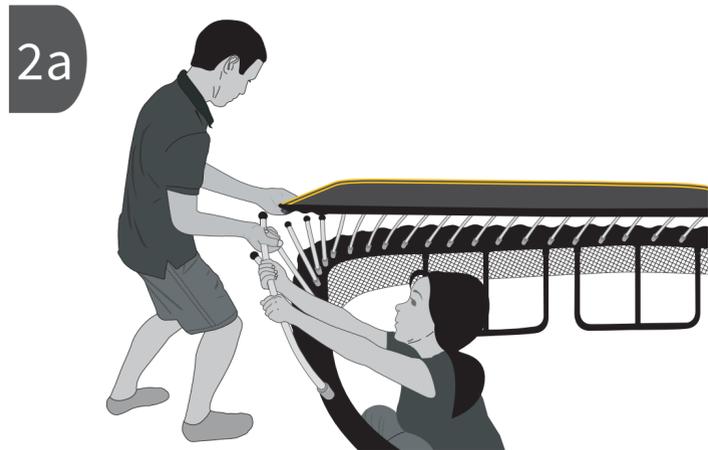


 **WARNING** - Treat any loaded rod with caution until you are sure it is properly installed or uninstalled. Keep your face well away from any loaded rod.

 **NOTE** - Two people are required for disassembly.  
**NOTE** - Before you remove a white mat rod from a mat rod holder read the instructions in Step 2b and 2c.

- Have one person position themselves inside the frame of the trampoline while the other stands outside as shown.

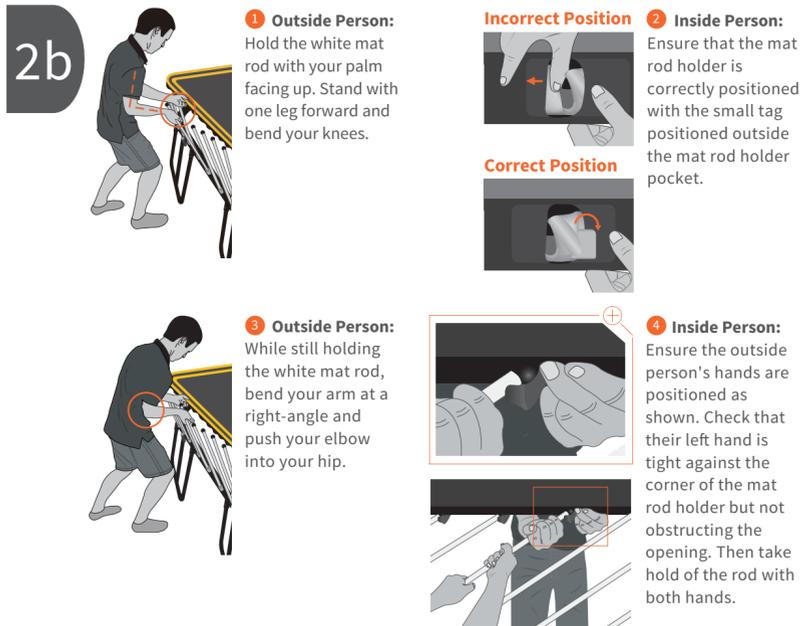


 **WARNING** - Treat any loaded rod with caution until you are sure it is properly installed or uninstalled. Keep your face well away from any loaded rod.

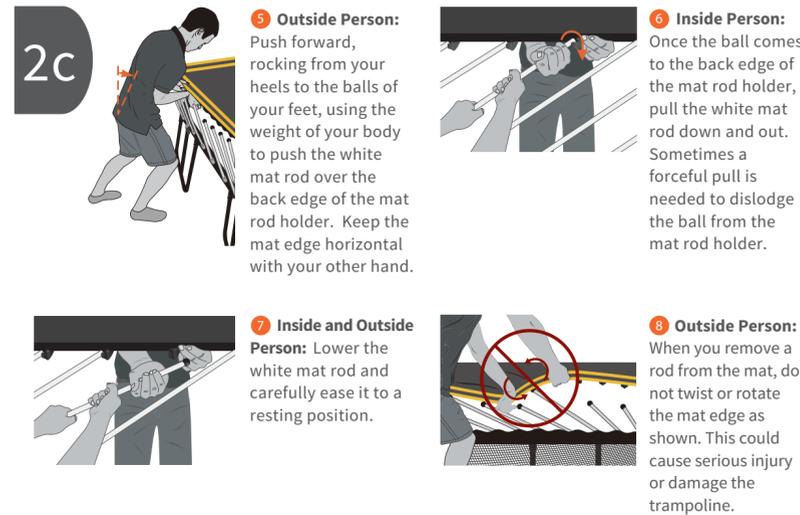

 **WARNING** - Treat any loaded rod with caution until you are sure it is properly installed or uninstalled. Keep your face well away from any loaded rod.  
**WARNING** - Both people must maintain a steady grip on the rod until it is in its resting position.

 **NOTE** - When uninstalling a white mat rod, be careful not to knock your hands against adjacent rods.

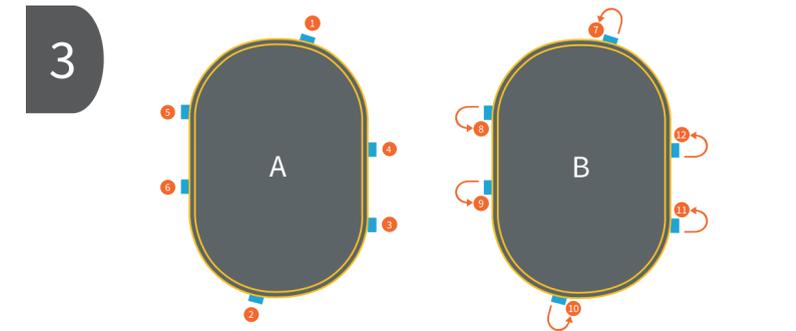

 **WARNING** - Treat any loaded rod with caution until you are sure it is properly installed or uninstalled. Keep your face well away from any loaded rod.

 **NOTE** - Following the sequence shown spreads the tension evenly across the mat. If you do not follow this sequence, it will be very difficult to remove the mat.

- Following the sequence shown in Image A and moving in a counter-clockwise direction, uninstall ONE white mat rod at each blue tag.
- Then following the sequence shown in Image B and still moving in a counter-clockwise direction, uninstall ONE additional rod next to each of the already uninstalled in figure A.
- Continue circling the trampoline in a counter-clockwise direction several more times following this sequence until all the white mat rods have been uninstalled.
- Remove the white mat rods from the frame and then pack the net, mat and rods.
- Disassemble the frame in the reverse order to which it was assembled.